



HOISTWAY SECTION

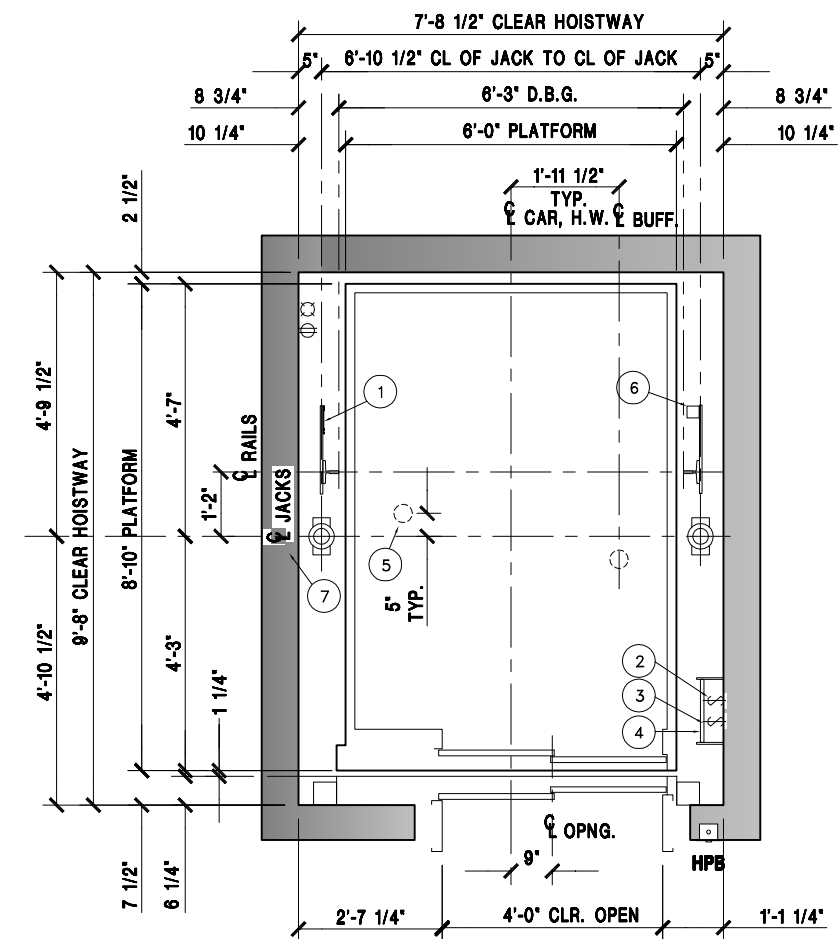

HOISTWAY PLAN

- 1 TAPE SELECTOR
- 2 LIGHT SWITCH-18" ABOVE LOWEST LANDING (BY OTHERS)
- 3 PIT STOP SWITCH
- 4 PIT LADDER (BY OTHERS)
- 5 SPRING BUFFERS LOCATED ON PIT FLOOR
- 6 LIMIT SWITCH

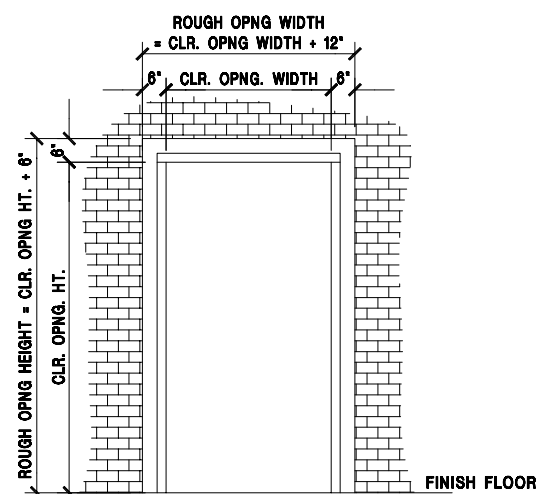

ROUGH OPENING FOR ENTRANCE INSTALLATION
 CMU, CONCRETE CONSTRUCTION ONLY;
 ROUGH OPENING IS NOT REQUIRED FOR
 DRY WALL CONSTRUCTION

PLEASE NOTE THAT THESE RAIL REACTION NUMBERS ARE ESTIMATES AND ARE SUBJECT TO CHANGE AS ACCURATE INFORMATION BECOMES AVAILABLE.

SPECIFICATION		
USAGE	SERVICE	
LOADING CLASS	A	
CAPACITY (LBS.)	4500	
RATED SPEED (FPM)	100,125	
RISE	MAX. 15'-0"	
RAIL REACTION (SEISMIC)		
R1 → R2	MAX. RAIL BRKT SPAN	14'-0"
	R1 (LBS.)	2453
	R2 (LBS.)	1226
	MAX. RAIL BRKT SPAN (DSA)	9'-0"
	R1 (LBS.)	2254
	R2 (LBS.)	1127
REV.	DATE	BY REVISIONS
NOTE: WHEN THE EQUIPMENT HAS BEEN RELEASED FOR FABRICATION. ANY CHANGES MADE AFTER APPROVAL WILL RESULT IN ADDITIONAL COST AND COMPLETION TIME.		<input checked="" type="checkbox"/> FOR APPROVAL <input type="checkbox"/> REVISED FOR APPROVAL <input type="checkbox"/> FINAL DISTRIBUTION <input type="checkbox"/> REVISED FINAL DISTRIBUTION
PROJECT:	----	
ADDRESS:	----	
CONTRACTOR:	----	
ARCHITECT:	----	
CONSULTANT:	----	
DRAWN:	JC	DATE: 9/6/13 APPROVED: JC
DWG. TITLE:	HOISTWAY PLAN & SECTION	
PROJECT NO.:	---	ELE#: 1
		DRAWING NO.:
		101