



HOISTWAY SECTION

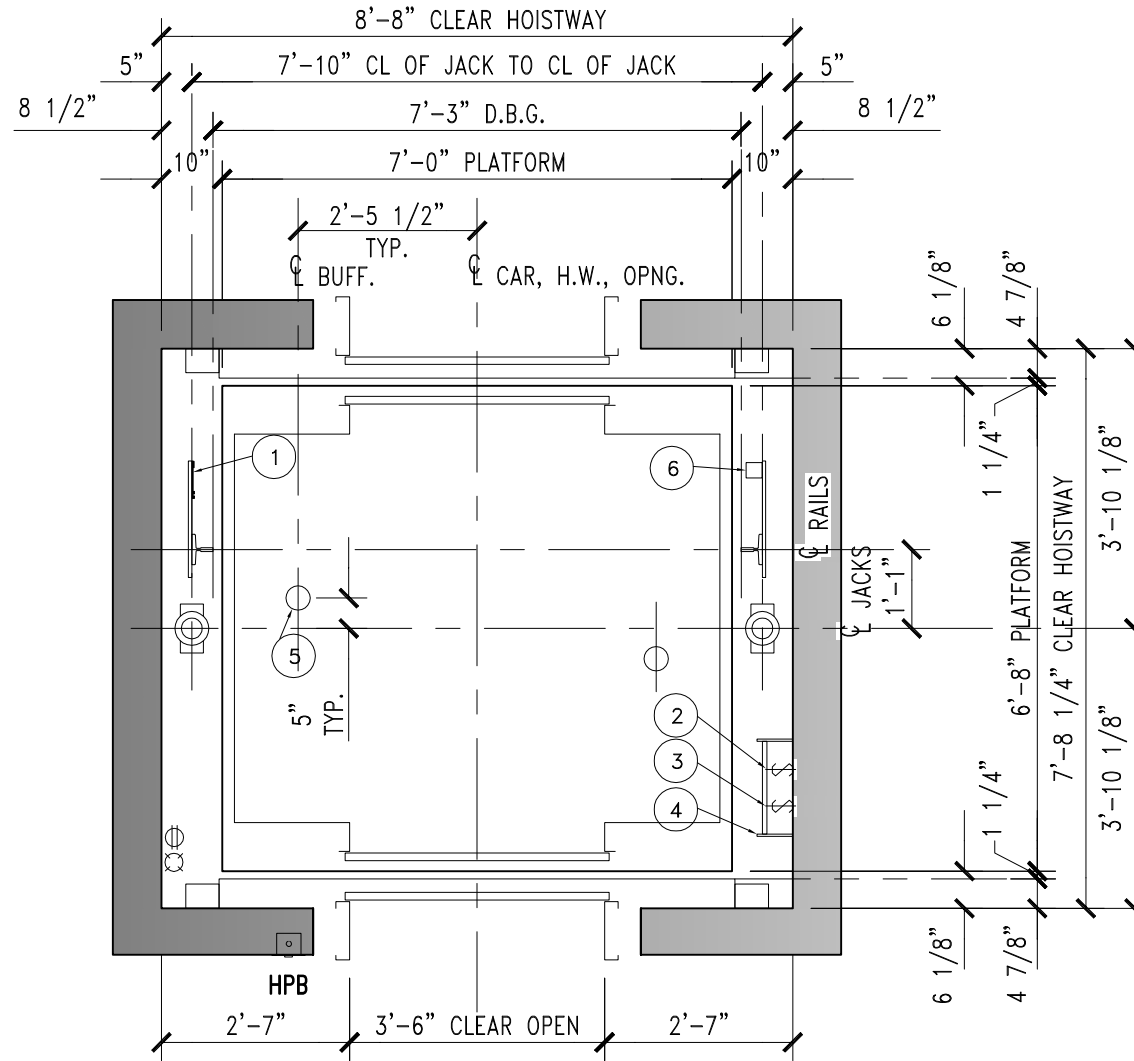

HOISTWAY PLAN

- 1 TAPE SELECTOR
- 2 LIGHT SWITCH-18" ABOVE LOWEST LANDING (BY OTHERS)
- 3 PIT STOP SWITCH
- 4 PIT LADDER (BY OTHERS)
- 5 SPRING BUFFERS LOCATED ON PIT FLOOR
- 6 LIMIT SWITCH

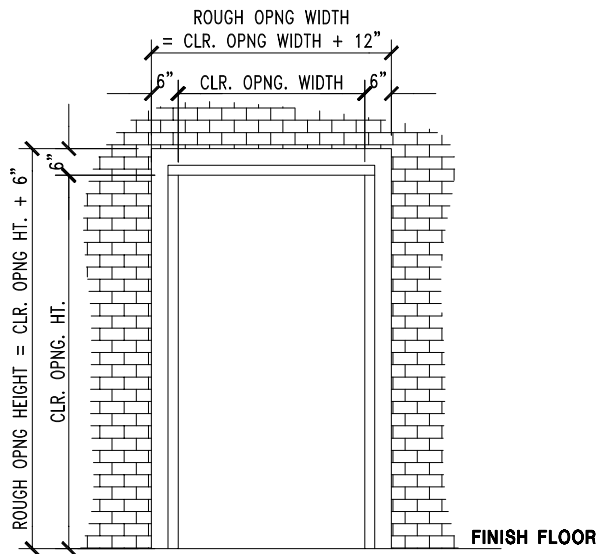

ROUGH OPENING FOR ENTRANCE INSTALLATION
 CMU, CONCRETE CONSTRUCTION ONLY;
 ROUGH OPENING IS NOT REQUIRED FOR
 DRY WALL CONSTRUCTION

PLEASE NOTE THAT THESE RAIL REACTION NUMBERS ARE ESTIMATES AND ARE SUBJECT TO CHANGE AS ACCURATE INFORMATION BECOMES AVAILABLE.

SPECIFICATION			
USAGE	PASSENGER		
LOADING CLASS	A		
CAPACITY (LBS.)	3500		
RATED SPEED (FPM)	100,125		
RISE	MAX. 15'-0"		
RAIL REACTION (SEISMIC)			
R2 R1	MAX. RAIL BRKT SPAN	14'-0"	
	R1 (LBS.)	2095	
	R2 (LBS.)	1048	
	MAX. RAIL BRKT SPAN (DSA)	9'-0"	
	R1 (LBS.)	1950	
	R2 (LBS.)	975	
REV.	DATE	BY	REVISIONS
NOTE: WHEN THE EQUIPMENT HAS BEEN RELEASED FOR FABRICATION. ANY CHANGES MADE AFTER APPROVAL WILL RESULT IN ADDITIONAL COST AND COMPLETION TIME.		<input checked="" type="checkbox"/> FOR APPROVAL <input type="checkbox"/> REVISED FOR APPROVAL <input type="checkbox"/> FINAL DISTRIBUTION <input type="checkbox"/> REVISED FINAL DISTRIBUTION	
PROJECT: ----			
ADDRESS: ----			
CONTRACTOR: ----			
ARCHITECT: ----			
CONSULTANT: ----			
DRAWN: JC		DATE: 9/6/13	APPROVED: JC
DWG. TITLE: HOISTWAY PLAN & SECTION			
PROJECT NO.: ---			ELE#: 1
			DRAWING NO.:
			101