


**HOISTWAY SECTION**

**SAFETY BEAM 5000 LBS. CAPACITY (BY OTHERS) CENTERED OVER RAILS AT TOP OF HOISTWAY. MAY REQUIRE REMOVAL LATER FOR LEGAL OVERHEAD.**


**SEE HOLELESS ELEVATOR MIN OVERHEAD MATRIX.**

**CONSULT LOCAL SALES OFFICE IF TRAVEL > 15 FT.**

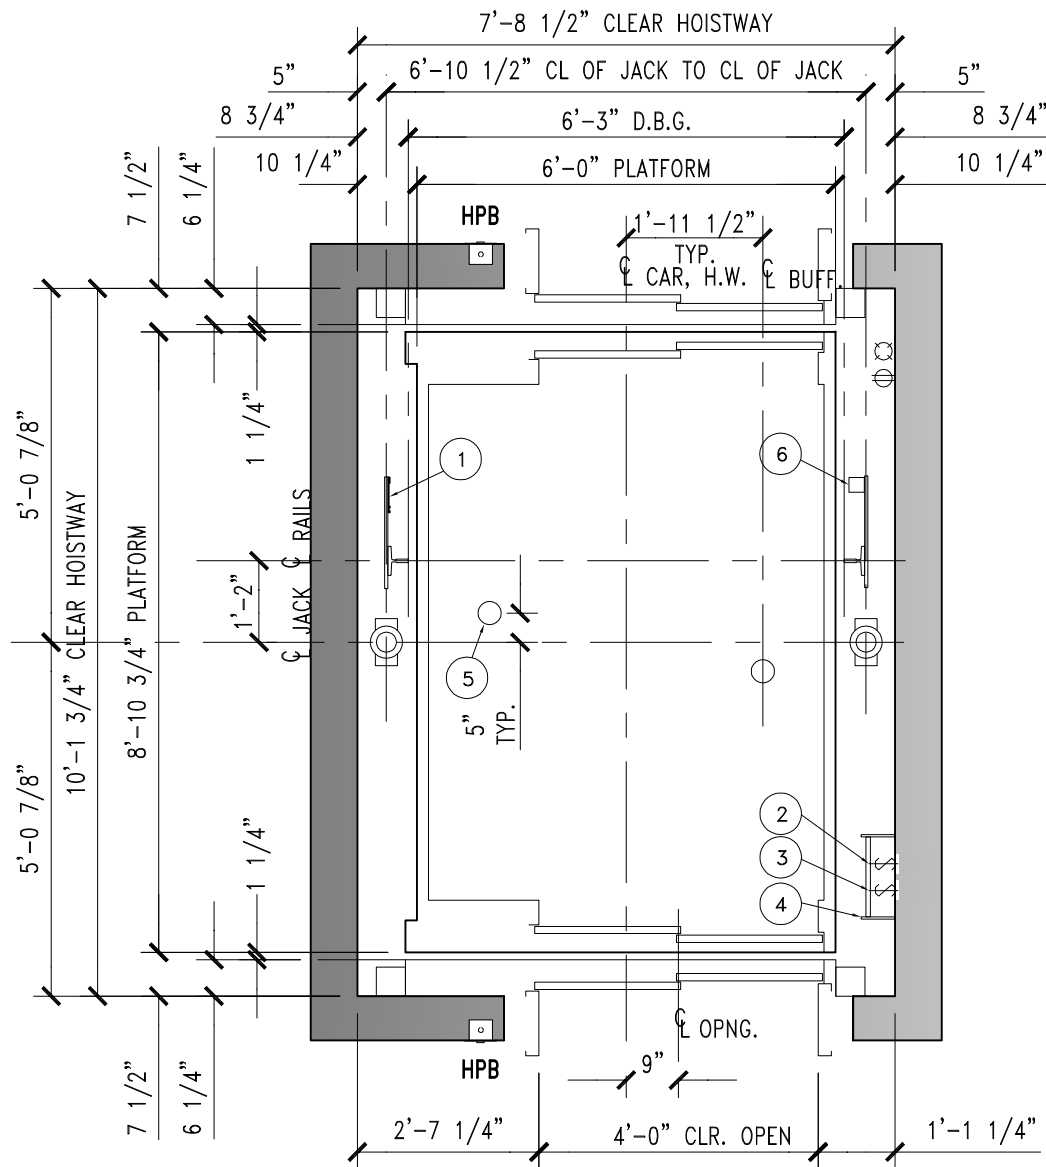

**HOISTWAY PLAN**

- 1 TAPE SELECTOR
- 2 LIGHT SWITCH-18" ABOVE LOWEST LANDING (BY OTHERS)
- 3 PIT STOP SWITCH
- 4 PIT LADDER ( BY OTHERS )
- 5 SPRING BUFFERS LOCATED ON PIT FLOOR
- 6 LIMIT SWITCH

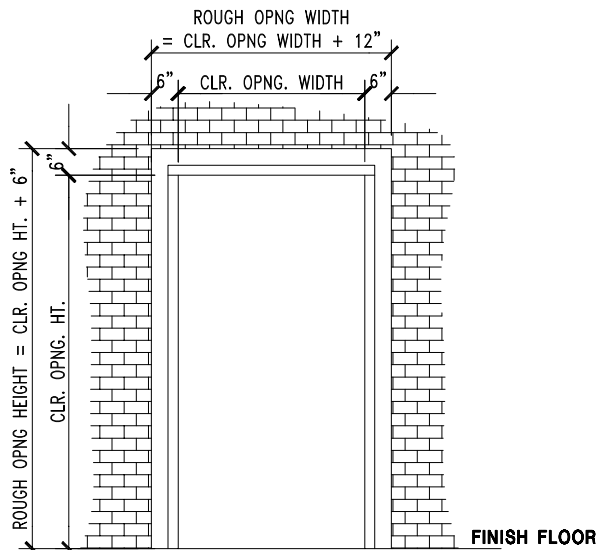

**ROUGH OPENING FOR ENTRANCE INSTALLATION  
CMU, CONCRETE CONSTRUCTION ONLY;  
ROUGH OPENING IS NOT REQUIRED FOR  
DRY WALL CONSTRUCTION**

PLEASE NOTE THAT THESE RAIL REACTION NUMBERS ARE ESTIMATES AND ARE SUBJECT TO CHANGE AS ACCURATE INFORMATION BECOMES AVAILABLE.

SPECIFICATION			
USAGE	SERVICE		
LOADING CLASS	A		
CAPACITY (LBS.)	4000		
RATED SPEED (FPM)	100,125		
RISE	MAX. 15'-0"		
RAIL REACTION (SEISMIC)			
R2 R1	MAX. RAIL BRKT SPAN	14'-0"	
	R1 (LBS.)	2362	
	R2 (LBS.)	1181	
	MAX. RAIL BRKT SPAN (DSA)	9'-0"	
	R1 (LBS.)	2188	
	R2 (LBS.)	1094	
REV.	DATE	BY	REVISIONS
NOTE: WHEN THE EQUIPMENT HAS BEEN RELEASED FOR FABRICATION, ANY CHANGES MADE AFTER APPROVAL WILL RESULT IN ADDITIONAL COST AND COMPLETION TIME.		<input checked="" type="checkbox"/> FOR APPROVAL <input type="checkbox"/> REVISED FOR APPROVAL <input type="checkbox"/> FINAL DISTRIBUTION <input type="checkbox"/> REVISED FINAL DISTRIBUTION	
PROJECT: ----			
ADDRESS: ----			
CONTRACTOR: ----			
ARCHITECT: ----			
CONSULTANT: ----			
DRAWN: JC	DATE: 9/6/13	APPROVED: JC	
DWG. TITLE: HOISTWAY PLAN & SECTION			
PROJECT NO.: ---			ELE#: 1
			DRAWING NO.:
			101