



# IDH-S-L2 Hydraulic Passenger Elevators

REVERSE ENTRANCE HOLELESS ELEVATORS

STANDARD SPEEDS: 100 FPM AND 125 FPM

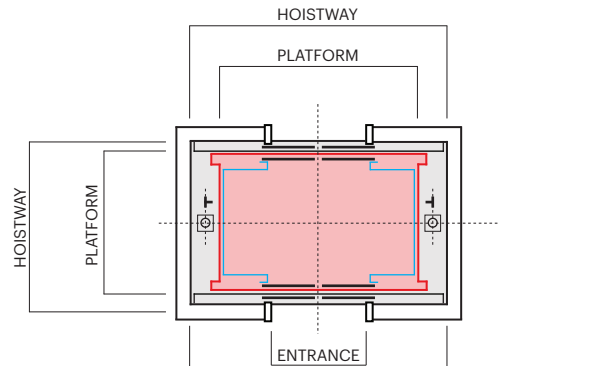


**Plan View of Center Open Single Slide**

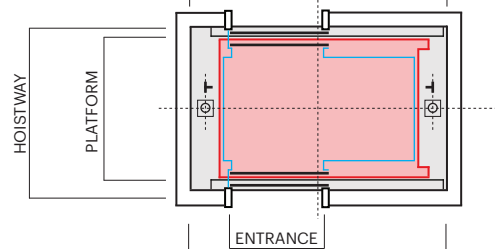


**Plan View of Handed Single Slide**

LEFT HAND SHOWN - RIGHT HAND AVAILABLE

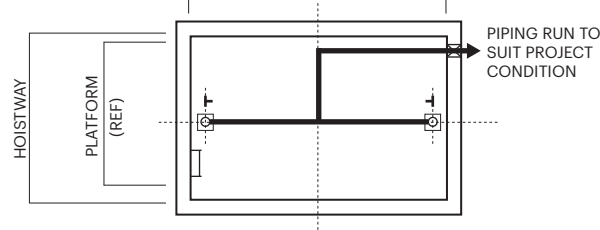

**Plan View of Elevator Pit Condition**

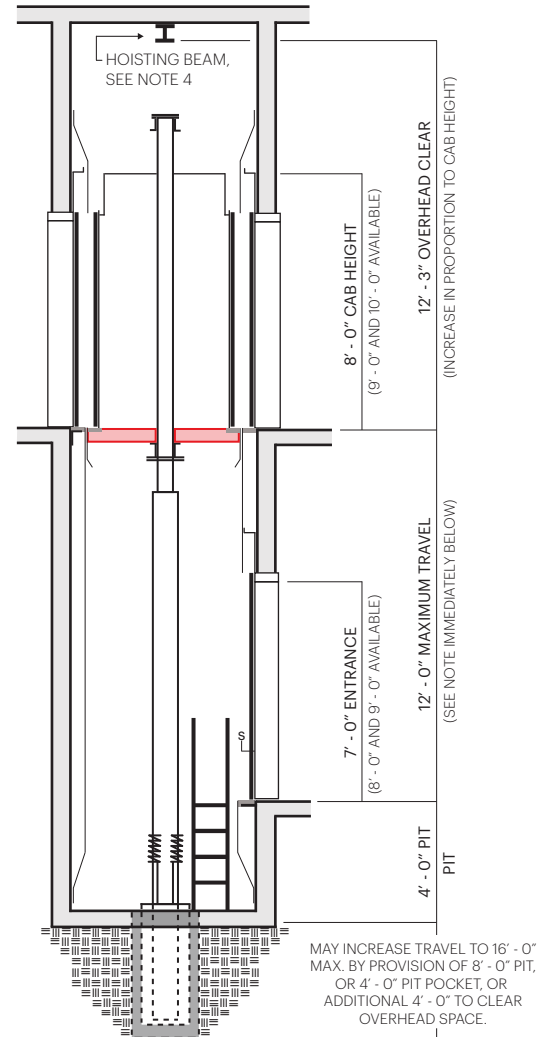

**Composite Hoistway Section**

| HOLELESS AND SEMI-HOLELESS HOISTWAY DIMENSIONS |          |             |          |         |                  |         |          |
|------------------------------------------------|----------|-------------|----------|---------|------------------|---------|----------|
| CAPACITY<br>(LBS.)                             | HOISTWAY |             | PLATFORM |         | CAR INSIDE CLEAR |         | ENTRANCE |
|                                                | Width    | Depth       | Width    | Depth   | Width            | Depth   |          |
| 2100                                           | 7' - 6"  | 6' - 7 1/2" | 6' - 0"  | 5' - 7" | 5' - 8"          | 4' - 3" | 3' - 0"  |
| 2500                                           | 8' - 6"  | 6' - 7 1/2" | 7' - 0"  | 5' - 7" | 6' - 8"          | 4' - 3" | 3' - 6"  |
| 3000                                           | 8' - 6"  | 7' - 0 1/2" | 7' - 0"  | 6' - 0" | 6' - 8"          | 4' - 8" | 3' - 6"  |
| 3500                                           | 8' - 6"  | 7' - 8 1/2" | 7' - 0"  | 6' - 8" | 6' - 8"          | 5' - 4" | 3' - 6"  |
| 4000                                           | 9' - 6"  | 7' - 8 1/2" | 8' - 0"  | 6' - 8" | 7' - 8"          | 5' - 4" | 4' - 0"  |

## NOTES:

1. Complies with ASME A17.1 code. Confirm dimensions comply with local codes and standards.
2. Provide min. 4" wide divider beam between adjacent hoistways for rail support.
3. For 24" x 84" stretcher use 3500 lbs. min. capacity with handed door or 4000 lbs. with center open door.
4. Provide hoisting beam capable of holding 5000 lb. load. Remove after installation if required.
5. Center opening configuration not available for 2100 lb. capacity elevators.